


Wiring Diagram



- Make the connections as per the above wiring diagram with according to the colours of wires from the control unit.
- Properly insulate the joints

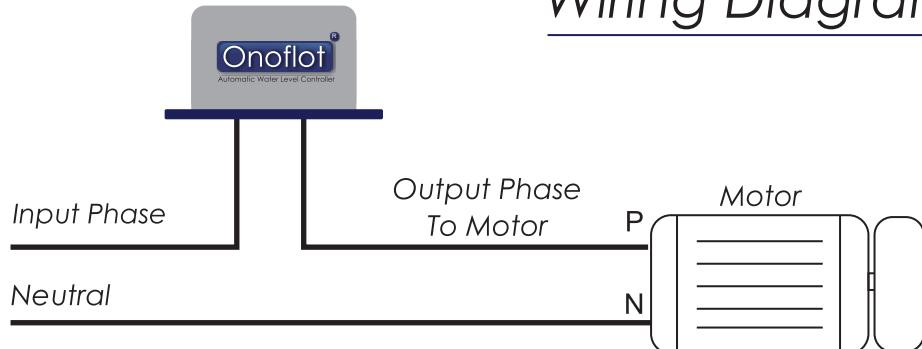

onoflot.com



intifos@gmail.com



[/Onoflot](#)

INSTALLATION MANUAL

Onoflot Basic

How To Install Onoflot:

- Fix the float unit on top of the water tank with the given screws. Make a 5mm hole and pass the plastic wire into the water tank.
- Insert stopper, float ball, and finally tie the dead weight at the end.
- The bottom of the dead weight should be at the minimum water level, where the motor is to be turned on.
- The dead weight should not rest on the tank base.
- The stopper should be fixed below the overflow level.
- The float ball should be able to move freely, between the stopper and dead weight, along the plastic wire.

Scan to
watch
Video Tutorial



<https://youtu.be/VSPVvI9VSM>

